


MOUNT AND CONNECT YOUR HANDBRAKE

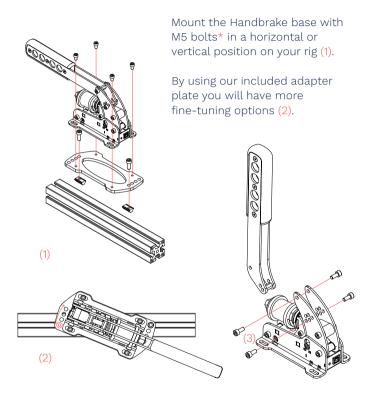



The lever of the Handbrake can be mounted in a horizontal (default) or vertical position relative to the base (3).

* All mentioned bolts and nuts are included.

ADJUST THE LEVER


Fine-tune the angle of the lever to your own needs for optimal ergonomics (4+5).






Use the USB cable to connect the Handbrake to your PC (6).

You are ready to race!



ADJUST THE ELASTOMER STACK

A total of 3 resistance settings are available to customize the Handbrake feel.




NOTE: Always use a 38mm spacer on either side of every elastomer




SMARTCONTROL & SMARTCONTROL LIVE

Heusinkveld® simracing products come with powerful software tools. Download SmartControl and SmartControl Live from our website heusinkveld.com/overview-smartcontrol-live

With SmartControl you can configure (non-linear) Handbrake output curves, set deadzones and brake force and save your settings to an unlimited number of profiles.





With **SmartControl LIV** you can activate your settings on the go. Change settings and apply your profiles while driving.





Read more about it

HEUSINKVELD®

FULL MANUAL & TUTORIALS

software can be found on our website. Check out our tutorials too.



PIT STOP FOR YOUR QUESTIONS

If you have any questions about our products or need help

JOIN OUR COMMUNITY









PLEASE RECYCLE RESPONSIBLY

out of paper and cardboard where







